


www.image-engineering.de

LENS FOCUS TEST CHART (72 SECTOR STAR)

REFLECTANCE

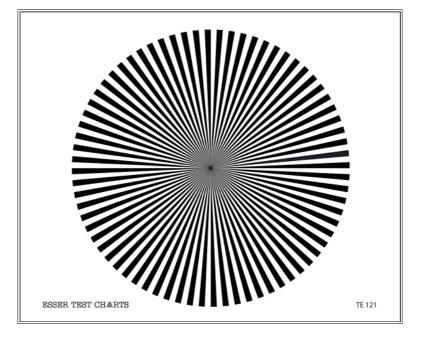

The TE121 test chart is designed for

- adjustment of camera lenses
- checking back focal distance

With the aid of a low transmission filter and by means of low level lighting make sure that the camera is not over modulated with the aperture in the open position.

- a) Optical focus: Adjust focus of zoom lens at greatest focal length.
- b) Back focal distance (lens): Adjust focus at shortest focal length by regulating lens mechanically with adjustment screw and optimize alternatively with a).
- c) Back focal distance (pick-up tubes): If focus varies from channel to channel between greatest and shortest focal length, the individual pick-up tubes must be adjusted mechanically in the optical axis.
- 1. Select white channel. Set optical focus at greatest focal length. With shortest focal length and divergent focus adjust the pick-up tube in W-channel until optimum focus is achieved. If necessary optimize by alternating with optical focus adjustment.
- 2. With unchanged optical focus adjustment and shortest focal length adjust the red and blue pick- up tube until optimum focus is achieved. Image focus (focus adjustment) is maintained at all focal lengths (zoom-in) and constant distance from object by means of back focal distance adjustment.

At the outer diameter of the sector star there is a resolution of the sector star there is a resolution of 50.5 lines, i.e. 0.65 MHz (625 lines) or 0.64 MHz (525 lines). The unresolved center of the star has a diameter of 1% of the outer diameter.