




EIAJ TEST CHART A / ITE RESOLUTION CHART

TRANSPARENCY

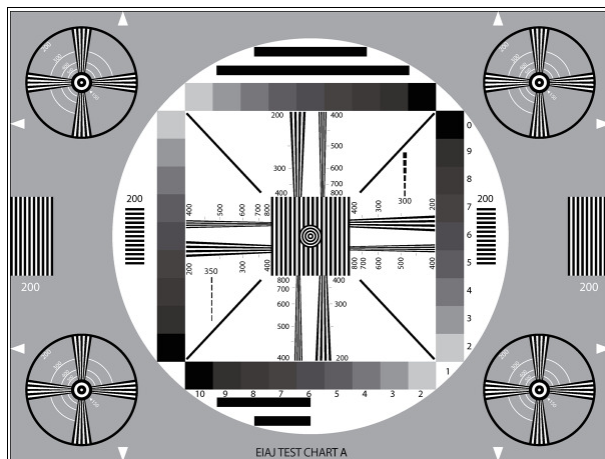

The TE95 test chart is designed for general (visual) appraisal of electronic cameras.

The density of the 4 gray scales increases from $D=0.15$ to $D=1.35$ (contrast 11:1) in gradations of $D=0.15$. Related to the picture white (transmission = 100%, $D=0$) the contrast ratio is 22:1. The surrounding area has a density of $D \approx 0.25$ (transmission = 57%) .

The test chart is designed primarily for orientating assessment of transmission characteristics of an electronic camera.

The circular figures enable rough appraisal of scan linearity to be made. The multi burst of 200 lines, distributed over the chart area, enable surveillance of linearity of deflection in horizontal and vertical directions. The distances between the black and white lines should be as equal as possible throughout.

With the aid of an oscilloscope with line selection switch, the vertical wedge-shaped rasters enable frequency response of modulation depth to be established. The signal of the 200 lines-bars is used as reference value. The wedge rasters further enable visual appraisal of the resolution limit to be made. In addition, cross color interferences and the effects of notch filters and comb filters can be observed.

The horizontal bars over and under the gray steps impart information on transmission characteristics in the middle frequency area (streaking). Rough appraisal of semitone reception is possible with aid of the gray scale; exact statements are not possible due to the white surroundings.

The four diagonal lines in the gray wedge square allow line interlacing to be checked. A ladder-shaped reception of the line indicates paired lines.