
www.image-engineering.de

SECTOR STAR TEST CHART (36 SECTORS WITH CORNER STARS)

REFLECTANCE

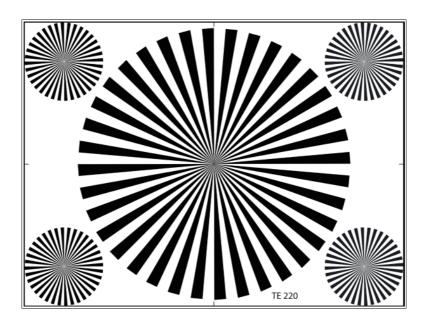

The TE220 test chart is designed for

- · adjustment of camera lenses
- · checking back focal distance

With the aid of a low transmission filter and by means of low level lighting make sure that the camera is not over modulated with the aperture in the open position.

- a) Optical focus: Adjust focus at shortest focal length.
- b) Back focal distance (lens): Adjust focus at shortest focal length by regulating lens mechanically with adjustment screw and optimize alternatively with a).
- c) Back focal distance (pick-up tubes): If focus varies from channel to channel between greatest and shortest focal length, the individual pick-up tubes must be adjusted mechanically in the optical axis.
- 1. Select white channel. Set optical focus at greatest focal length. With shortest focal length and divergent focus adjust the pick-up tube in W-channel until optimum focus is achieved. If necessary optimize by alternating with optical focus adjustment.
- 2. With unchanged optical focus adjustment and shortest focal length adjust the red and blue pick-up tube until optimum focus is achieved. Image focus (focus adjustment) is maintained at all focal lengths (zoomin) and constant distance from object by means of back focal distance adjustment.